




# FÖRDERANLAGEN - BELT CONVEYORS GTK PÁSOVÉ DOPRAVNÍKY

GTK, spol s r.o., CZ-687 07 TUPESY 116, okres Uherské Hradiště, Česká republika

Tel.: +420 572 520 880-9, Fax: +420 572 520 899

## Válečkové stolice

Verze:

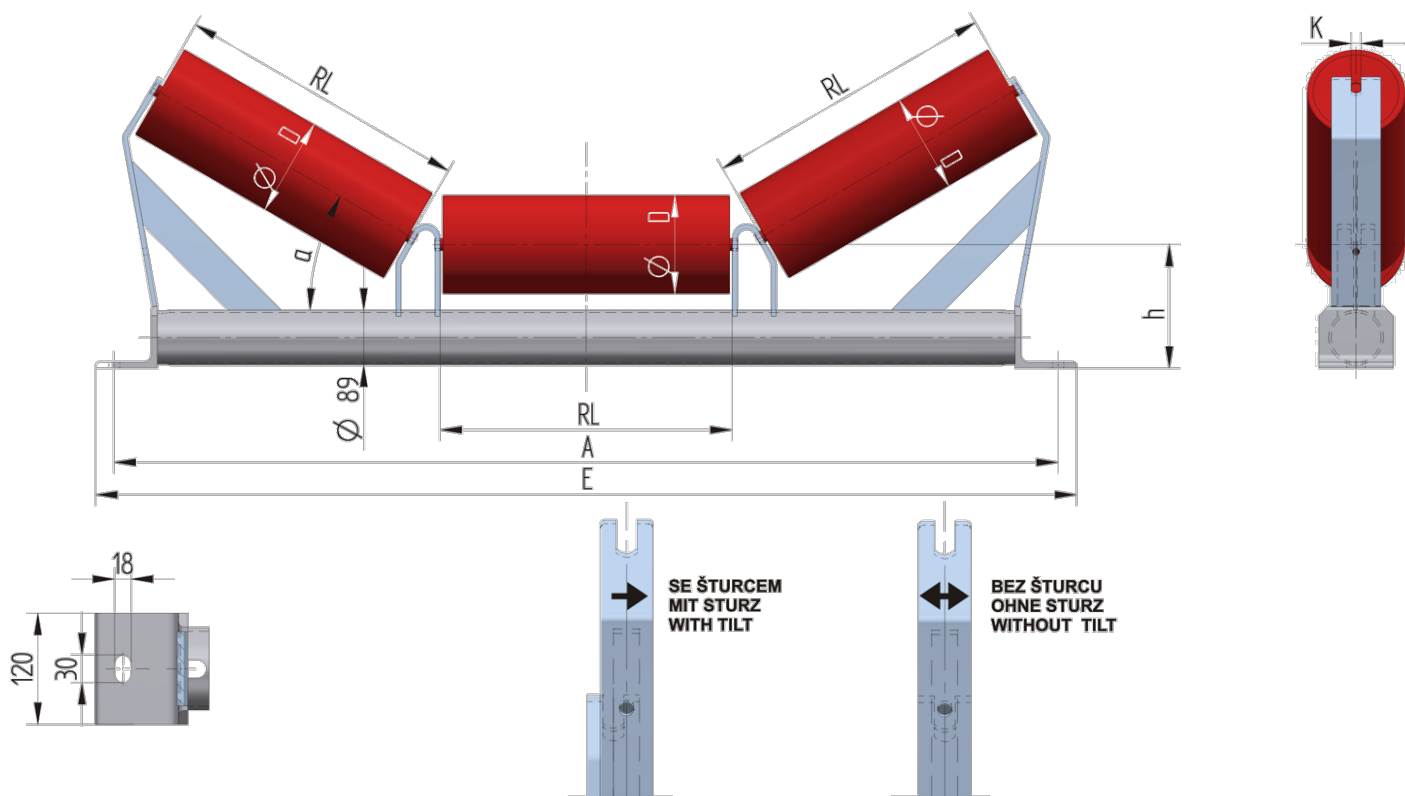

BB(mm)	Úhel°	D(mm)	RL(mm)	h(mm)	A(mm)	E(mm)	m(kg)	Artikl
800	15	108,159	315	200	1090	1140	17.04	TR8908015200
800	20	108,159	315	200	1090	1140	17.53	TR8908020200
800	25	108,159	315	200	1090	1140	17.82	TR8908025200
800	30	108,159	315	200	1090	1140	18.55	TR8908030200
800	35	108,159	315	200	1090	1140	19.05	TR8908035200
800	40	108,159	315	200	1090	1140	19.55	TR8908040200
800	45	108,159	315	200	1090	1140	20.05	TR8908045200
1000	15	108,159	380	200	1290	1340	18.09	TR8910015200
1000	20	108,159	380	200	1290	1340	19.73	TR8910020200
1000	25	108,159	380	200	1290	1340	20.17	TR8910025200
1000	30	108,159	380	200	1290	1340	20.76	TR8910030200
1000	35	108,159	380	200	1290	1340	21.31	TR8910035200
1000	40	108,159	380	200	1290	1340	21.85	TR8910040200
1000	45	108,159	380	200	1290	1340	22.51	TR8910045200
1200	15	108,159	465	200	1530	1590	21.53	TR8912015200
1200	20	108,159	465	200	1530	1590	21.95	TR8912020200
1200	25	108,159	465	200	1530	1590	22.68	TR8912025200
1200	30	108,159	465	200	1530	1590	23.45	TR8912030200
1200	35	108,159	465	200	1530	1590	24.38	TR8912035200
1200	40	108,159	465	200	1530	1590	24.86	TR8912040200

GTK spol. s r.o., CZ-68707 Tupesy 116, Czech Republik, Tel.: +420 572 520 880-9, Fax: +420 520 899  
e-mail: gtk@gktupesy.cz, www.gktupesy.cz





**FÖRDERANLAGEN - BELT CONVEYORS**  
**GTK PÁSOVÉ DOPRAVNÍKY**

GTK, spol s r.o., CZ-687 07 TUPESY 116, okres Uherské Hradiště, Česká republika Tel.: +420 572 520 880-9, Fax: +420 572 520 899

1200	45	108,159	465	200	1530	1590	25.61	TR8912045200
1400	15	108,159	530	200	1730	1790	23.39	TR8914015200
1400	20	108,159	530	200	1730	1790	24.00	TR8914020200
1400	25	108,159	530	200	1730	1790	24.78	TR8914025200
1400	30	108,159	530	200	1730	1790	25.63	TR8914030200
1400	35	108,159	530	200	1730	1790	26.41	TR8914035200
1400	40	108,159	530	200	1730	1790	27.12	TR8914040200
1400	45	108,159	530	200	1730	1790	27.88	TR8914045200