



FÖRDERANLAGEN - BELT CONVEYORS GTK PÁSOVÉ DOPRAVNÍKY


GTK, spol s r.o., CZ-687 07 TUPESY 116, okres Uherské Hradiště, Česká republika

Tel.: +420 572 520 880-9, Fax: +420 572 520 899

Tragstationen PAL

U70/50/4-DIN 59413

Version: 2020-11-03

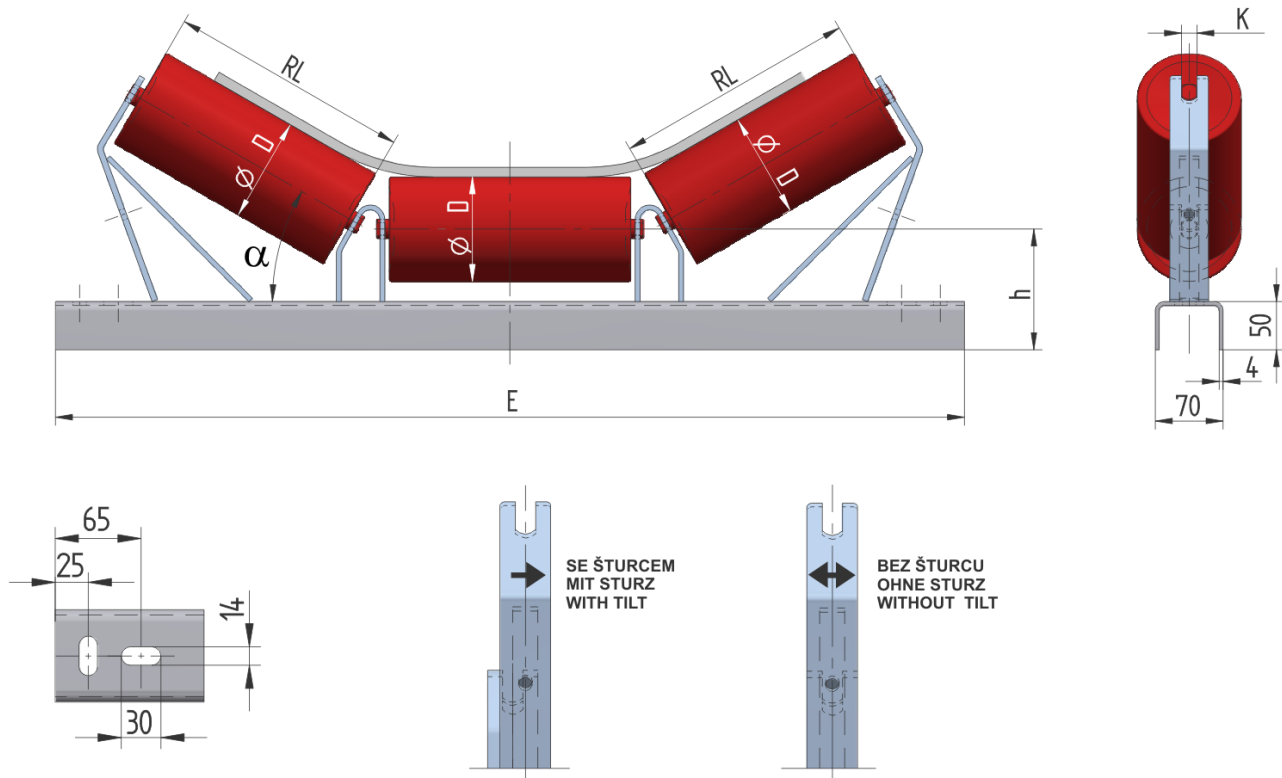

BB(mm)	Muldung°	D(mm)	RL(mm)	h(mm)	E(mm)	m(kg)	Artikl
500	15	63,89,108	200	125	790	5.37	PAL05015125
500	20	63,89,108	200	125	790	5.49	PAL05020125
500	25	63,89,108	200	125	790	5.58	PAL05025125
500	30	63,89,108	200	125	790	5.66	PAL05030125
500	35	63,89,108	200	125	790	5.72	PAL05035125
500	40	63,89,108	200	125	790	5.85	PAL05040125
500	45	63,89,108	200	125	790	5.95	PAL05045125
650	15	63,89,108	250	125	940	6.17	PAL06515125
650	20	63,89,108	250	125	940	6.33	PAL06520125
650	25	63,89,108	250	125	940	6.45	PAL06525125
650	30	63,89,108	250	125	940	6.54	PAL06530125
650	35	63,89,108	250	125	940	6.64	PAL06535125
650	40	63,89,108	250	125	940	6.77	PAL06540125
650	45	63,89,108	250	125	940	6.92	PAL06545125
800	15	63,89,108	315	125	1140	7.56	PAL08015125
800	20	63,89,108	315	125	1140	7.82	PAL08020125
800	25	63,89,108	315	125	1140	8.00	PAL08025125
800	30	63,89,108	315	125	1140	8.13	PAL08030125
800	35	63,89,108	315	125	1140	8.30	PAL08035125
800	40	63,89,108	315	125	1140	8.51	PAL08040125

GTK spol. s r.o., CZ-68707 Tupesy 116, Czech Republik, Tel.: +420 572 520 880-9, Fax: +420 520 899
e-mail: gtk@gktupesy.cz, www.gktupesy.cz



800	45	63,89,108	315	125	1140	8.73	<i>PAL08045125</i>
1000	15	63,89,108	380	125	1340	8.60	<i>PAL10015125</i>
1000	20	63,89,108	380	125	1340	8.82	<i>PAL10020125</i>
1000	25	63,89,108	380	125	1340	9.08	<i>PAL10025125</i>
1000	30	63,89,108	380	125	1340	9.27	<i>PAL10030125</i>
1000	35	63,89,108	380	125	1340	9.53	<i>PAL10035125</i>
1000	40	63,89,108	380	125	1340	9.76	<i>PAL10040125</i>
1000	45	63,89,108	380	125	1340	9.97	<i>PAL10045125</i>
1200	15	63,89,108	465	125	1590	9.96	<i>PAL12015125</i>
1200	20	63,89,108	465	125	1590	10.30	<i>PAL12020125</i>
1200	25	63,89,108	465	125	1590	10.57	<i>PAL12025125</i>
1200	30	63,89,108	465	125	1590	10.82	<i>PAL12030125</i>
1200	35	63,89,108	465	125	1590	11.13	<i>PAL12035125</i>
1200	40	63,89,108	465	125	1590	11.38	<i>PAL12040125</i>
1200	45	63,89,108	465	125	1590	11.66	<i>PAL12045125</i>