



FÖRDERANLAGEN - BELT CONVEYORS GTK PÁSOVÉ DOPRAVNÍKY


GTK, spol s r.o., CZ-687 07 TUPESY 116, okres Uherské Hradiště, Česká republika

Tel.: +420 572 520 880-9, Fax: +420 572 520 899

Idler frames PAL

U70/50/4-DIN 59413

Version: 2020-11-03

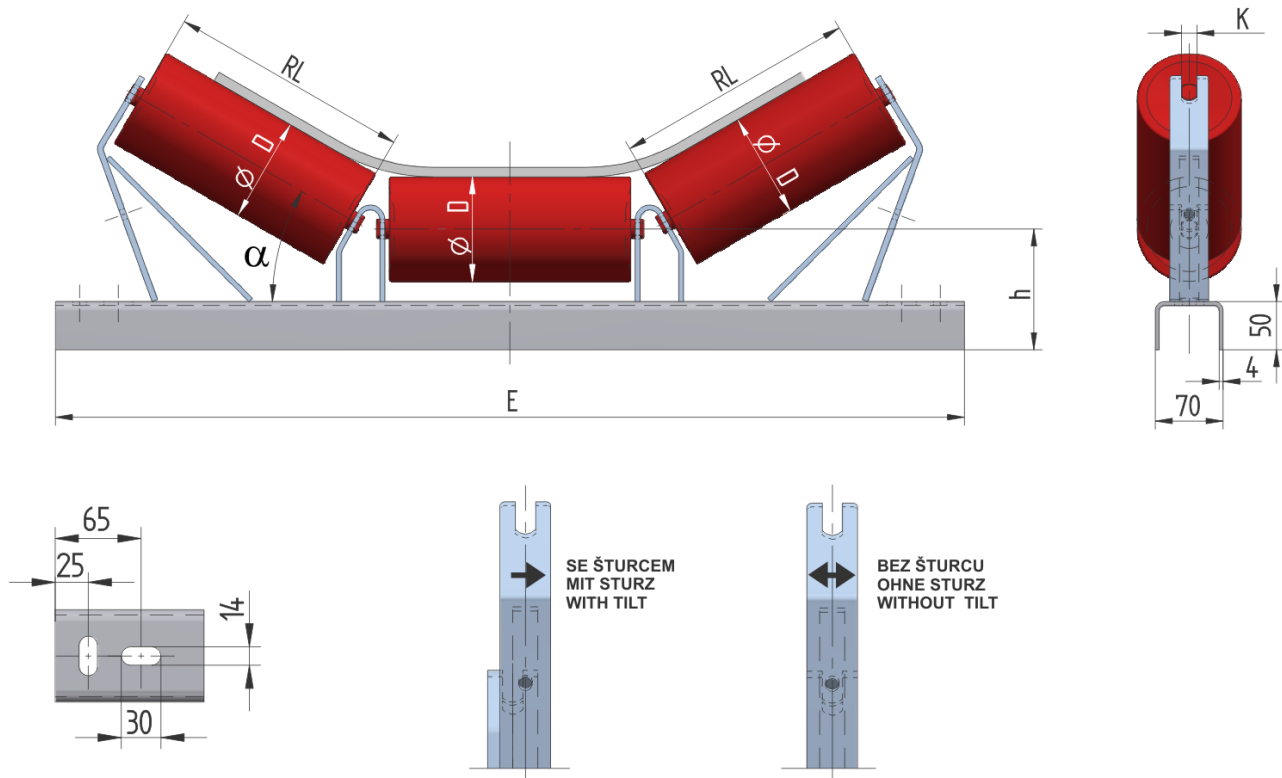

BB(mm)	Inclination°	D(mm)	RL(mm)	h(mm)	E(mm)	m(kg)	Artikel
500	15	63,89,108	200	125	790	5.37	PAL05015125
500	20	63,89,108	200	125	790	5.49	PAL05020125
500	25	63,89,108	200	125	790	5.58	PAL05025125
500	30	63,89,108	200	125	790	5.66	PAL05030125
500	35	63,89,108	200	125	790	5.72	PAL05035125
500	40	63,89,108	200	125	790	5.85	PAL05040125
500	45	63,89,108	200	125	790	5.95	PAL05045125
650	15	63,89,108	250	125	940	6.17	PAL06515125
650	20	63,89,108	250	125	940	6.33	PAL06520125
650	25	63,89,108	250	125	940	6.45	PAL06525125
650	30	63,89,108	250	125	940	6.54	PAL06530125
650	35	63,89,108	250	125	940	6.64	PAL06535125
650	40	63,89,108	250	125	940	6.77	PAL06540125
650	45	63,89,108	250	125	940	6.92	PAL06545125
800	15	63,89,108	315	125	1140	7.56	PAL08015125
800	20	63,89,108	315	125	1140	7.82	PAL08020125
800	25	63,89,108	315	125	1140	8.00	PAL08025125
800	30	63,89,108	315	125	1140	8.13	PAL08030125
800	35	63,89,108	315	125	1140	8.30	PAL08035125
800	40	63,89,108	315	125	1140	8.51	PAL08040125

GTK spol. s r.o., CZ-68707 Tupesy 116, Czech Republik, Tel.: +420 572 520 880-9, Fax: +420 520 899
e-mail: gkt@gktupesy.cz, www.gktupesy.cz



800	45	63,89,108	315	125	1140	8.73	PAL08045125
1000	15	63,89,108	380	125	1340	8.60	PAL10015125
1000	20	63,89,108	380	125	1340	8.82	PAL10020125
1000	25	63,89,108	380	125	1340	9.08	PAL10025125
1000	30	63,89,108	380	125	1340	9.27	PAL10030125
1000	35	63,89,108	380	125	1340	9.53	PAL10035125
1000	40	63,89,108	380	125	1340	9.76	PAL10040125
1000	45	63,89,108	380	125	1340	9.97	PAL10045125
1200	15	63,89,108	465	125	1590	9.96	PAL12015125
1200	20	63,89,108	465	125	1590	10.30	PAL12020125
1200	25	63,89,108	465	125	1590	10.57	PAL12025125
1200	30	63,89,108	465	125	1590	10.82	PAL12030125
1200	35	63,89,108	465	125	1590	11.13	PAL12035125
1200	40	63,89,108	465	125	1590	11.38	PAL12040125
1200	45	63,89,108	465	125	1590	11.66	PAL12045125