



FÖRDERANLAGEN - BELT CONVEYORS GTK PÁSOVÉ DOPRAVNÍKY


GTK, spol s r.o., CZ-687 07 TUPESY 116, okres Uherské Hradiště, Česká republika

Tel.: +420 572 520 880-9, Fax: +420 572 520 899

Idler frames PAL

U70/50/4-DIN 59413

Version: 2020-11-03

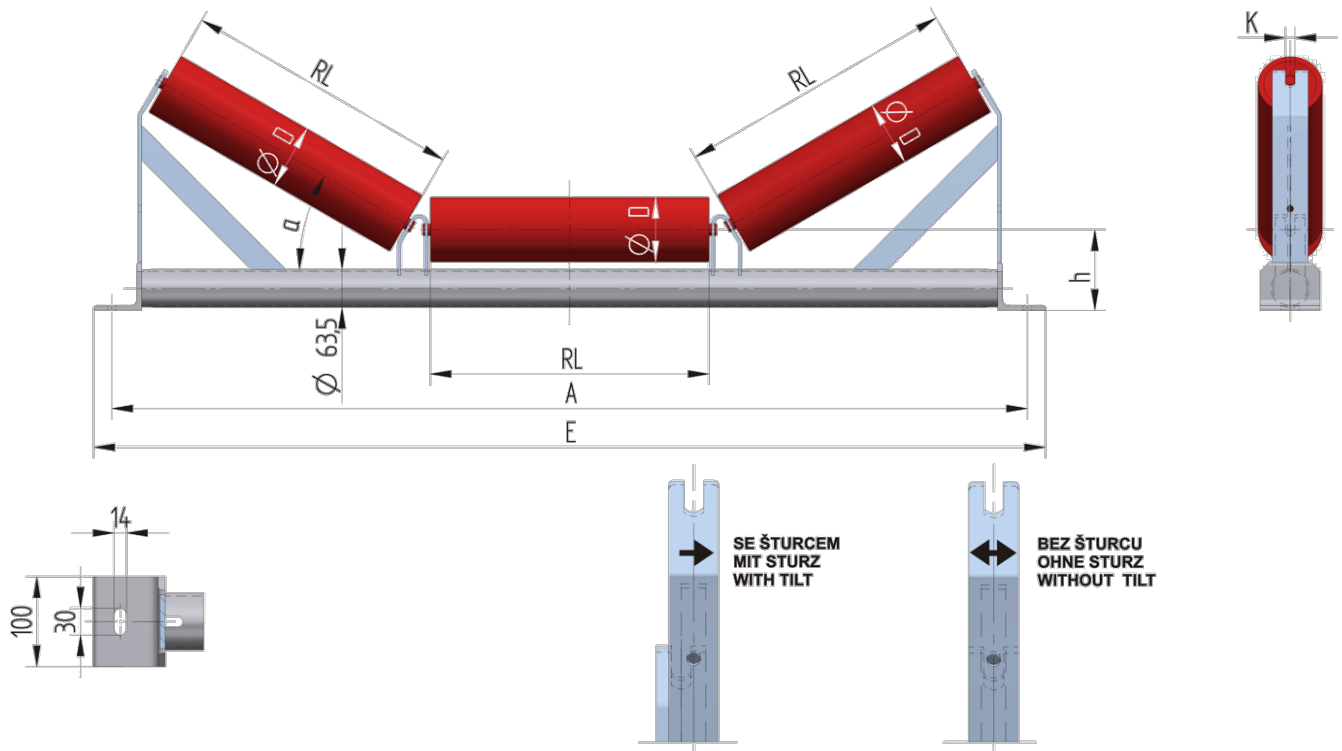

BB(mm)	Inclination°	D(mm)	RL(mm)	h(mm)	A(mm)	E(mm)	m(kg)	Artikl
500	15	89,108	200	135	740	790	6.94	TR6305015135
500	20	89,108	200	135	740	790	7.24	TR6305020135
500	25	89,108	200	135	740	790	7.34	TR6305025135
500	30	89,108	200	135	740	790	7.47	TR6305030135
500	35	89,108	200	135	740	790	7.65	TR6305035135
500	40	89,108	200	135	740	790	7.83	TR6305040135
500	45	89,108	200	135	740	790	8.04	TR6305045135
650	15	89,108	250	135	890	940	7.73	TR6306515135
650	20	89,108	250	135	890	940	8.05	TR6306520135
650	25	89,108	250	135	890	940	8.20	TR6306525135
650	30	89,108	250	135	890	940	8.40	TR6306530135
650	35	89,108	250	135	890	940	8.62	TR6306535135
650	40	89,108	250	135	890	940	8.84	TR6306540135
650	45	89,108	250	135	890	940	9.10	TR6306545135
800	15	89,108	315	135	1090	1140	8.75	TR6308015135
800	20	89,108	315	135	1090	1140	9.13	TR6308020135
800	25	89,108	315	135	1090	1140	9.38	TR6308025135
800	30	89,108	315	135	1090	1140	9.68	TR6308030135

GTK spol. s r.o., CZ-68707 Tupesy 116, Czech Republik, Tel.: +420 572 520 880-9, Fax: +420 520 899
e-mail: gtk@gktupesy.cz, www.gktupesy.cz



800	35	89,108	315	135	1090	1140	9.95	TR6308035135
800	40	89,108	315	135	1090	1140	9.95	TR6308040135
800	45	89,108	315	135	1090	1140	10.38	TR6308045135
1000	15	89,108	380	135	1290	1340	10.05	TR6310015135
1000	20	89,108	380	135	1290	1340	10.29	TR6310020135
1000	25	89,108	380	135	1290	1340	10.65	TR6310025135
1000	30	89,108	380	135	1290	1340	10.92	TR6310030135
1000	35	89,108	380	135	1290	1340	11.25	TR6310035135
1000	40	89,108	380	135	1290	1340	11.42	TR6310040135
1000	45	89,108	380	135	1290	1340	11.74	TR6310045135
1200	15	89,108	465	135	1530	1590	11.41	TR6312015135
1200	20	89,108	465	135	1530	1590	11.71	TR6312020135
1200	25	89,108	465	135	1530	1590	12.10	TR6312025135
1200	30	89,108	465	135	1530	1590	12.52	TR6312030135
1200	35	89,108	465	135	1530	1590	12.85	TR6312035135
1200	40	89,108	465	135	1530	1590	13.16	TR6312040135
1200	45	89,108	465	135	1530	1590	13.21	TR6312045135