



FÖRDERANLAGEN - BELT CONVEYORS GTK PÁSOVÉ DOPRAVNÍKY


GTK, spol s r.o., CZ-687 07 TUPESY 116, okres Uherské Hradiště, Česká republika

Tel.: +420 572 520 880-9, Fax: +420 572 520 899

Idler frames PAL

U70/50/4-DIN 59413

Version: 2020-11-03

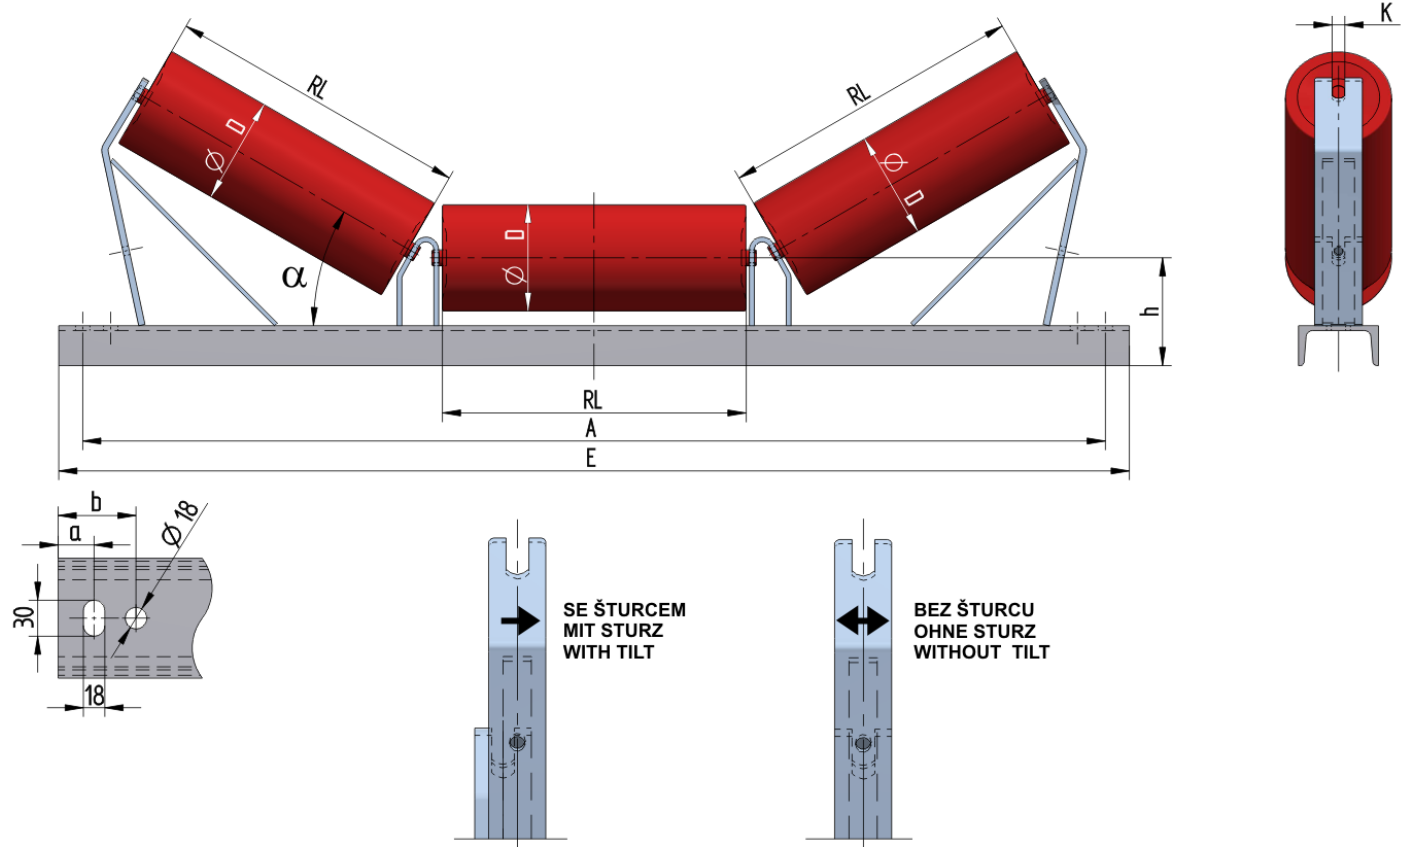

BB(mm)	Inclination°	D(mm)	RL(mm)	h(mm)	A(mm)	E(mm)	a(mm)	b(mm)	m(kg)	Artikl
1000	15	89,108,133,159	380	160	1290	1340	25	65	26.10	U1410015160
1000	20	89,108,133,159	380	160	1290	1340	25	65	26.70	U1410020160
1000	25	89,108,133,159	380	160	1290	1340	25	65	27.20	U1410025160
1000	30	89,108,133,159	380	160	1290	1340	25	65	27.80	U1410030160
1000	35	89,108,133,159	380	160	1290	1340	25	65	28.30	U1410035160
1000	40	89,108,133,159	380	160	1290	1340	25	65	28.90	U1410040160
1000	45	89,108,133,159	380	160	1290	1340	25	65	29.60	U1410045160
1200	15	89,108,133,159	465	160	1530	1590	30	65	30.60	U1412015160
1200	20	89,108,133,159	465	160	1530	1590	30	65	31.20	U1412020160
1200	25	89,108,133,159	465	160	1530	1590	30	65	31.70	U1412025160
1200	30	89,108,133,159	465	160	1530	1590	30	65	32.40	U1412030160
1200	35	89,108,133,159	465	160	1530	1590	30	65	33.10	U1412035160
1200	40	89,108,133,159	465	160	1530	1590	30	65	33.70	U1412040160
1200	45	89,108,133,159	465	160	1530	1590	30	65	34.60	U1412045160
1400	15	89,108,133,159	530	160	1730	1790	30	65	34.00	U1414015160
1400	20	89,108,133,159	530	160	1730	1790	30	65	34.70	U1414020160
1400	25	89,108,133,159	530	160	1730	1790	30	65	35.30	U1414025160

GTK spol. s r.o., CZ-68707 Tupesy 116, Czech Republik, Tel.: +420 572 520 880-9, Fax: +420 520 899
e-mail: gtk@gktupesy.cz, www.gktupesy.cz





FÖRDERANLAGEN - BELT CONVEYORS GTK PÁSOVÉ DOPRAVNÍKY

GTK, spol s r.o., CZ-687 07 TUPESY 116, okres Uherské Hradiště, Česká republika

Tel.: +420 572 520 880-9, Fax: +420 572 520 899

1400	30	89,108,133,159	530	160	1730	1790	30	65	36.10	U1414030160
1400	35	89,108,133,159	530	160	1730	1790	30	65	36.90	U1414035160
1400	40	89,108,133,159	530	160	1730	1790	30	65	37.60	U1414040160
1400	45	89,108,133,159	530	160	1730	1790	30	65	38.40	U1414045160
1600	15	89,108,133,159	600	160	1980	2040	30	65	38.20	U1416015160
1600	20	89,108,133,159	600	160	1980	2040	30	65	38.90	U1416020160
1600	25	89,108,133,159	600	160	1980	2040	30	65	39.70	U1416025160
1600	30	89,108,133,159	600	160	1980	2040	30	65	40.70	U1416030160
1600	35	89,108,133,159	600	160	1980	2040	30	65	41.30	U1416035160
1600	40	89,108,133,159	600	160	1980	2040	30	65	42.30	U1416040160
1600	45	89,108,133,159	600	160	1980	2040	30	65	43.20	U1416045160
1800	15	89,108,133,159	670	160	2180	2240	30	65	41.70	U1418015160
1800	20	89,108,133,159	670	160	2180	2240	30	65	42.30	U1418020160
1800	25	89,108,133,159	670	160	2180	2240	30	65	43.30	U1418025160
1800	30	89,108,133,159	670	160	2180	2240	30	65	44.20	U1418030160
1800	35	89,108,133,159	670	160	2180	2240	30	65	45.20	U1418035160
1800	40	89,108,133,159	670	160	2180	2240	30	65	46.00	U1418040160
1800	45	89,108,133,159	670	160	2180	2240	30	65	47.10	U1418045160



GTK spol. s r.o., CZ-68707 Tupesy 116, Czech Republik, Tel.: +420 572 520 880-9, Fax: +420 520 899
e-mail: gtk@gktupesy.cz, www.gktupesy.cz

