



FÖRDERANLAGEN - BELT CONVEYORS GTK PÁSOVÉ DOPRAVNÍKY


GTK, spol s r.o., CZ-687 07 TUPESY 116, okres Uherské Hradiště, Česká republika

Tel.: +420 572 520 880-9, Fax: +420 572 520 899

Idler frames PAL

U70/50/4-DIN 59413

Version: 2020-11-03

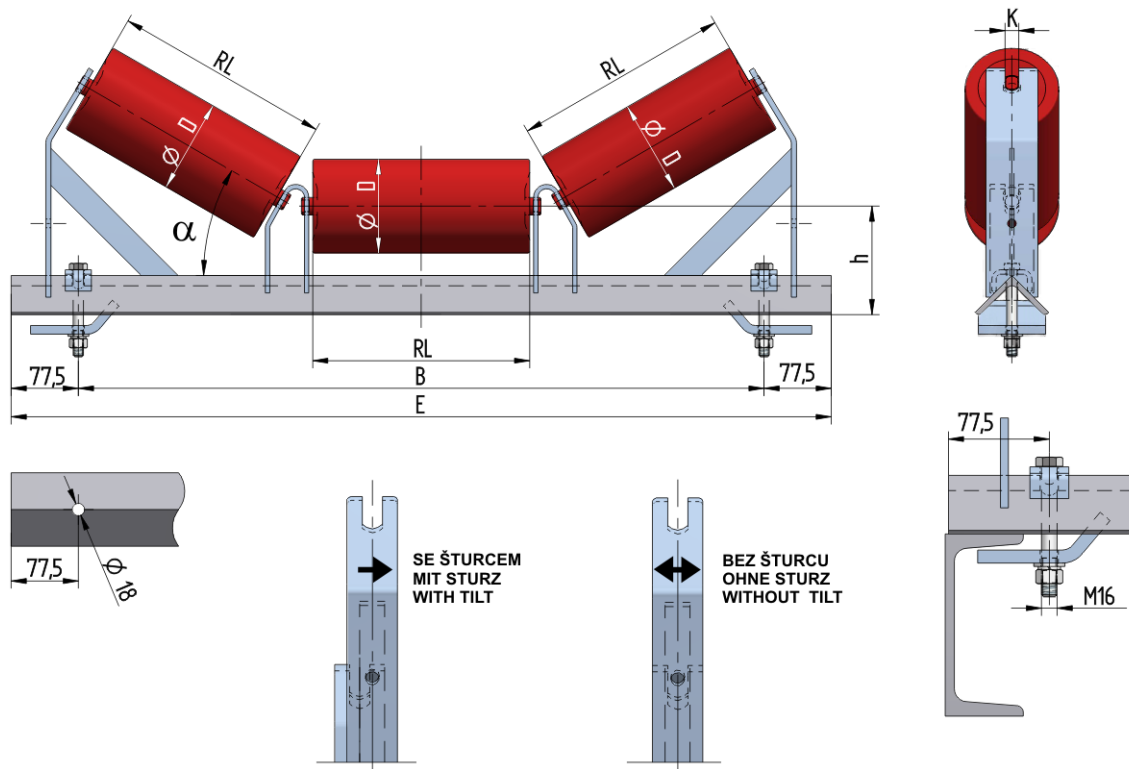

BB(mm)	Inclination°	D(mm)	RL(mm)	h(mm)	B(mm)	E(mm)	m(kg)	Artikl
800	15	89,108,133,159	315	160	990	1145	17.90	VAL808015160
800	20	89,108,133,159	315	160	990	1145	18.30	VAL808020160
800	25	89,108,133,159	315	160	990	1145	19.70	VAL808025160
800	30	89,108,133,159	315	160	990	1145	20.00	VAL808030160
800	35	89,108,133,159	315	160	990	1145	20.40	VAL808035160
800	40	89,108,133,159	315	160	990	1145	21.00	VAL808040160
800	45	89,108,133,159	315	160	990	1145	21.70	VAL808045160
1000	15	89,108,133,159	380	160	1190	1345	20.00	VAL810015160
1000	20	89,108,133,159	380	160	1190	1345	20.40	VAL810020160
1000	25	89,108,133,159	380	160	1190	1345	21.90	VAL810025160
1000	30	89,108,133,159	380	160	1190	1345	22.50	VAL810030160
1000	35	89,108,133,159	380	160	1190	1345	23.00	VAL810035160
1000	40	89,108,133,159	380	160	1190	1345	23.80	VAL810040160
1000	45	89,108,133,159	380	160	1190	1345	24.30	VAL810045160
1200	15	89,108,133,159	465	160	1440	1595	22.60	VAL812015160
1200	20	89,108,133,159	465	160	1440	1595	24.20	VAL812020160
1200	25	89,108,133,159	465	160	1440	1595	24.80	VAL812025160
1200	30	89,108,133,159	465	160	1440	1595	25.50	VAL812030160
1200	35	89,108,133,159	465	160	1440	1595	26.20	VAL812035160

GTK spol. s r.o., CZ-68707 Tupesy 116, Czech Republik, Tel.: +420 572 520 880-9, Fax: +420 520 899
e-mail: gkt@gktupesy.cz, www.gktupesy.cz





FÖRDERANLAGEN - BELT CONVEYORS GTK PÁSOVÉ DOPRAVNÍKY

GTK, spol s r.o., CZ-687 07 TUPESY 116, okres Uherské Hradiště, Česká republika

Tel.: +420 572 520 880-9, Fax: +420 572 520 899

1200	40	89,108,133,159	465	160	1440	1595	27.00	VAL812040160
1200	45	89,108,133,159	465	160	1440	1595	27.70	VAL812045160
1400	15	89,108,133,159	530	160	1640	1795	24.80	VAL814015160
1400	20	89,108,133,159	530	160	1640	1795	26.50	VAL814020160
1400	25	89,108,133,159	530	160	1640	1795	27.20	VAL814025160
1400	30	89,108,133,159	530	160	1640	1795	28.00	VAL814030160
1400	35	89,108,133,159	530	160	1640	1795	28.60	VAL814035160
1400	40	89,108,133,159	530	160	1640	1795	29.60	VAL814040160
1400	45	89,108,133,159	530	160	1640	1795	30.40	VAL814045160
1600	15	89,108,133,159	600	160	1890	2045	28.40	VAL816015160
1600	20	89,108,133,159	600	160	1890	2045	29.20	VAL816020160
1600	25	89,108,133,159	600	160	1890	2045	30.00	VAL816025160
1600	30	89,108,133,159	600	160	1890	2045	30.90	VAL816030160
1600	35	89,108,133,159	600	160	1890	2045	31.80	VAL816035160
1600	40	89,108,133,159	600	160	1890	2045	32.70	VAL816040160
1600	45	89,108,133,159	600	160	1890	2045	33.60	VAL816045160

